

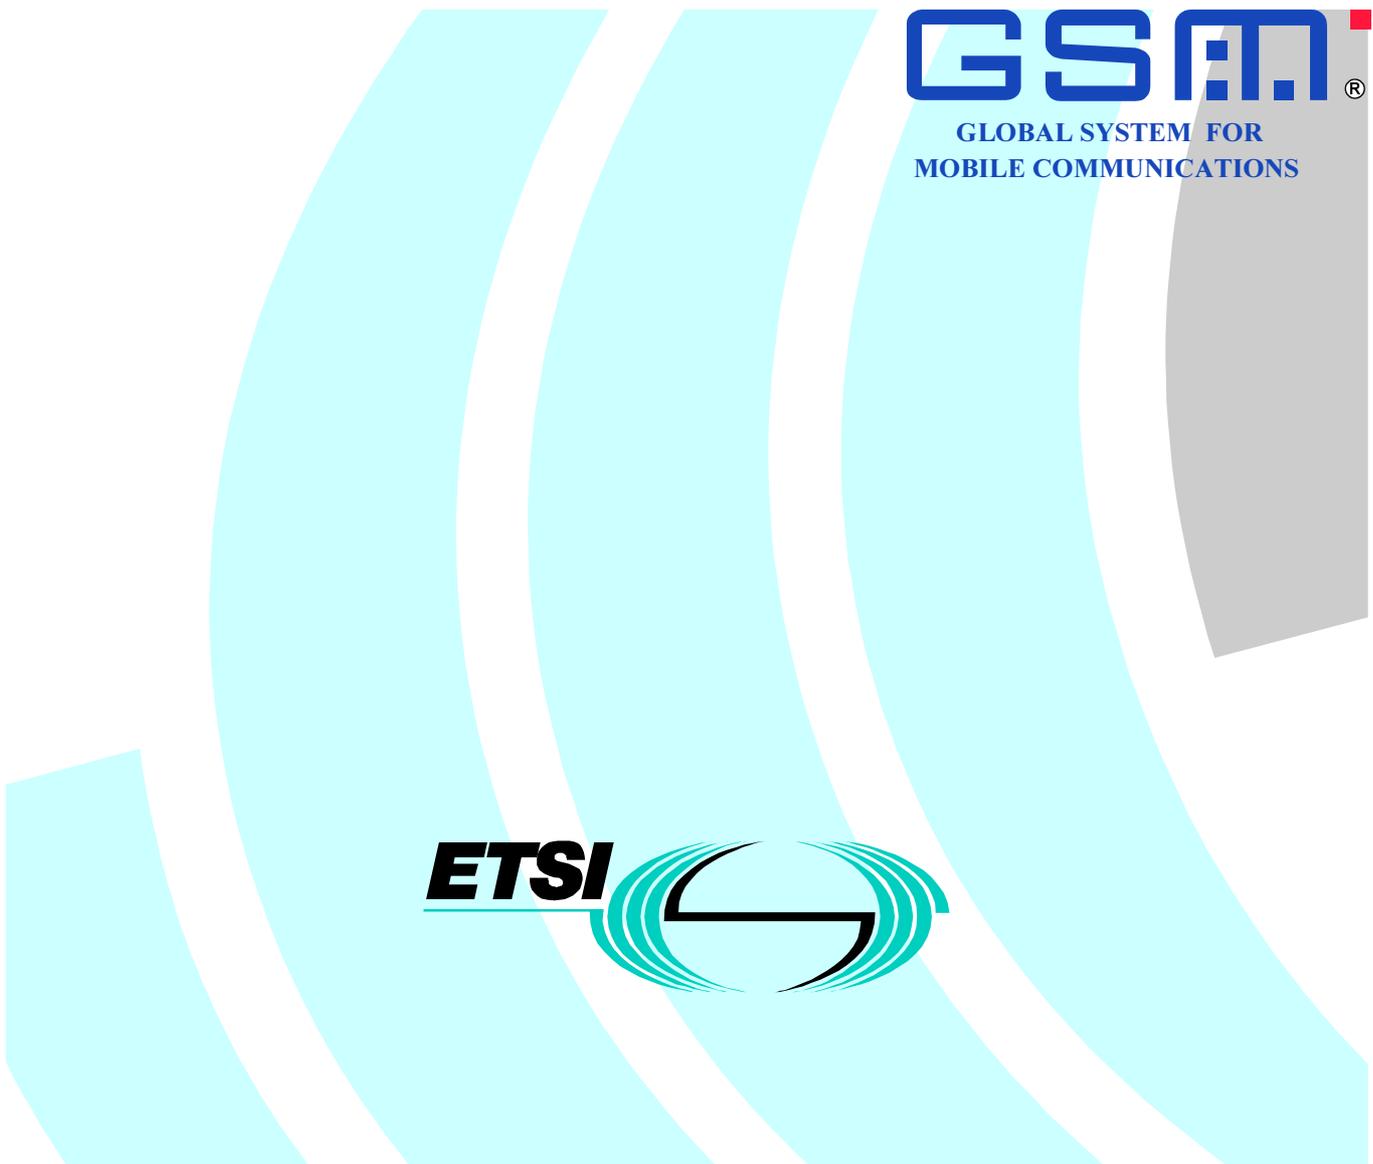
# ETSI EN 300 963 V8.0.1 (2000-11)

---

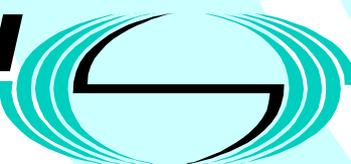
*European Standard (Telecommunications series)*

**Digital cellular telecommunications system (Phase 2+);  
Full rate speech;  
Comfort noise aspect for full rate speech traffic channels  
(GSM 06.12 version 8.0.1 Release 1999)**

---

The background of the lower half of the page features a large, stylized graphic of concentric, overlapping light blue and white curved bands, resembling a signal or sound wave. The GSM logo is positioned in the upper right area of this graphic.

**GSM**®  
GLOBAL SYSTEM FOR  
MOBILE COMMUNICATIONS

**ETSI** 

---

Reference

---

REN/SMG-110612Q8

Keywords

---

Digital cellular telecommunications system,  
Global System for Mobile communications (GSM)

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

***Important notice***

---

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
editor@etsi.fr

***Copyright Notification***

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.  
All rights reserved.

---

# Contents

Intellectual Property Rights .....	4
Foreword.....	4
1 Scope .....	5
2 References .....	5
3 Definitions and abbreviations.....	5
4 General .....	5
5 Functions on the transmit side.....	6
5.1 Background acoustic noise evaluation.....	6
5.2 SID-frame encoding .....	6
6 Functions on the receive side .....	7
6.1 Comfort noise generation and updating.....	7
<b>Annex A (informative): Change Request History.....</b>	<b>8</b>
History .....	9

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Special Mobile Group (SMG).

The present document specifies the comfort noise aspect for full rate speech traffic channels for the digital cellular telecommunications system.

The contents of the present document is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will be re-released with an identifying change of release date and an increase in version number as follows:

Version 8.x.y

where:

- 8 indicates Release 1999of GSM Phase 2+.
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

<b>National transposition dates</b>	
Date of adoption of this EN:	3 November 2000
Date of latest announcement of this EN (doa):	28 February 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 August 2001
Date of withdrawal of any conflicting National Standard (dow):	31 August 2001

---

# 1 Scope

The present document gives the detailed requirements for the correct operation of the background acoustic noise evaluation, noise parameter encoding/decoding and comfort noise generation in GSM Mobile Stations (MS)s and Base Station Systems (BSS)s during Discontinuous Transmission (DTX) on full rate speech traffic channels.

The requirements described in the present document are mandatory for implementation in all GSM MSs. The receiver requirements are mandatory for implementation in all GSM BSSs, the transmitter requirements only for those where downlink DTX will be used.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- For this Release 1999 document, references to GSM documents are for Release 1999 versions (version 8.x.y).

- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 05.03: "Digital cellular telecommunications system (Phase 2+); Channel coding".
- [3] GSM 06.10: "Digital cellular telecommunications system (Phase 2+); Full rate speech; Transcoding".
- [4] GSM 06.31: "Digital cellular telecommunications system (Phase 2+); Full rate speech; Discontinuous Transmission (DTX) for full rate speech traffic channel".

---

# 3 Definitions and abbreviations

Definitions and abbreviations used in the present document are listed in GSM 01.04 [1].

The definitions of terms used in this technical specification can be found in GSM 06.31 [4].

---

# 4 General

The overall operation of Discontinuous Transmission is described in GSM 06.31 [4].

A basic problem when using DTX is that the background acoustic noise, which is transmitted together with the speech, would disappear when the radio transmission is cut, resulting in a modulation of the background noise. Since the DTX switching can take place rapidly, it has been found that this effect can be very annoying for the listener - especially in a car environment with high background noise levels. In bad cases the speech may be hardly intelligible.

The present document specifies the way to overcome this problem by generating on the receive side synthetic noise similar to the transmit side background noise. The parameters of this so called comfort noise are estimated on the transmit side and transmitted to the receive side before the radio transmission is cut and at a regular low rate afterwards. This allows the comfort noise to adapt to the changes of the noise on the transmit side.

## 5 Functions on the transmit side

The comfort noise evaluation algorithm uses the unquantized block amplitude and Log Area Ratio (LAR) parameters of the full rate speech encoder, defined in clauses 4.2.15 and 4.2.6 of GSM 06.10 [3]. These parameters give information on the level and the spectrum of the background noise, respectively.

The evaluated comfort noise parameters are encoded into a special frame, called a SID (Silence Descriptor) frame, for transmission to the receive side.

The SID frame also serves to initiate the comfort noise generation on the receive side, as a SID frame is always sent at the end of a speech burst, i.e. before the radio transmission is cut.

The scheduling of SID or speech frames on the radio path is described in GSM 06.31 [4].

### 5.1 Background acoustic noise evaluation

The comfort noise parameters to be encoded into a SID frame are calculated over  $N=4$  consecutive frames marked with  $VAD=0$ , as follows:

The Log Area Ratio parameters shall be averaged according to the equation:

$$\text{mean}(LAR(i)) = \frac{1}{N} \sum_{n=1}^N LAR[j-n](i) \quad i = 1,2,..8$$

where  $LAR[j](i)$  is the  $i$ 'th Log Area Ratio coefficient of the current frame  $j$  and  $j-n$  indicates the previous frames.

The block amplitude parameter shall be averaged according to the equation:

$$\text{mean}(x_{\max}) = \frac{1}{(4N)} \sum_{n=1}^N \sum_{i=1}^4 x_{\max}[j-n](i) \quad i = 1,2,..8$$

where  $x_{\max}[j](i)$  is the block amplitude in sub-segment  $i$  of the current frame. The SID frame containing these averaged parameters is passed to the Radio Subsystem instead of frame number  $j$ .

### 5.2 SID-frame encoding

The SID-frame encoding algorithm exploits the fact that only some of the 260 bits in a frame are needed to code the comfort noise parameters. The other bits can then be used to mark the SID-frame by means of a fixed bit pattern, called the SID code word.

The log area ratio coefficients are replaced by the mean ( $LAR(i)$ ) values defined above and encoded as described in GSM 06.10 [3].

The block amplitude values are replaced by the mean ( $x_{\max}$ ) value defined above, repeated four times inside the frame and encoded as described in GSM 06.10 [3].

The SID code word consists of 95 bits which are all zero. The bits of the SID code word are inserted in the SID field defined as the positions of those 95 bits of the encoded RPE-pulses  $X_{mc}$ , which are in the error protection class I (see GSM 05.03 [2], table 2).

The remaining bits in the SID frame are set to zero. The use of these bits is for further study.

---

## 6 Functions on the receive side

The situations in which comfort noise shall be generated on the receive side are defined in GSM 06.31 [4]. Generally speaking, the comfort noise generation is started or updated whenever a valid SID frame is received.

### 6.1 Comfort noise generation and updating

The comfort noise generation procedure uses the RPE-LTP speech decoder algorithm defined in GSM 06.10 [3].

When comfort noise is to be generated, then the various encoded parameters are set as follows.

The RPE pulses ( $X_{\text{mcr}}$ ) are replaced by a locally generated random integer sequence, uniformly distributed between 1 and 6.

Also the grid position parameters ( $M_{\text{cr}}$ ) are set to random integer values, uniformly distributed between 0 and 3.

The LTP gain values ( $b_{\text{cr}}$ ) are set to 0.

The LTP lag values ( $N_{\text{cr}}$ ) of the 4 sub-segments are set to 40, 120, 40 and 120 respectively.

The 4 block amplitude values ( $X_{\text{maxcr}}$ ) used are those received in the SID frame.

The log area ratio parameters ( $LAR_{\text{cr}}$ ) used are those received in the SID frame.

With these parameters, the speech decoder now performs the standard operations described in GSM 06.10 [3] and synthesizes comfort noise.

Updating of the comfort noise parameters occurs each time a valid SID frame is received, as described in GSM 06.31 [4].

When updating the comfort noise, the parameters above should preferably be interpolated over a few frames to obtain smooth transitions.

---

## Annex A (informative): Change Request History

<b>Change history</b>					
<b>SMG No.</b>	<b>TDoc. No.</b>	<b>CR. No.</b>	<b>Clause affected</b>	<b>New version</b>	<b>Subject/Comments</b>
SMG#07				4.0.4	ETSI Publication
SMG#20				5.0.1	Release 1996 version
SMG#27				6.0.0	Release 1997 version
SMG#29				7.0.0	Release 1998 version
				7.0.1	Version update to 7.0.1 for Publication
SMG#31				8.0.0	Release 1999 version
				8.0.1	Update to Version 8.0.1 for Publication

---

# History

<b>Document history</b>		
V8.0.0	July 2000	One-step Approval Procedure OAP 20001103: 2000-07-05 to 2000-11-03
V8.0.1	November 2000	Publication